



Dimension's Table

Steel toe cap

Tabella Dimensionale

Puntali Acciaio





Type

Modello

SAFIT Srl

402

Via Casonetto,17 - 36050 Friola (VI) -
ITALY Tel.0444 668335
Fax0424 561073

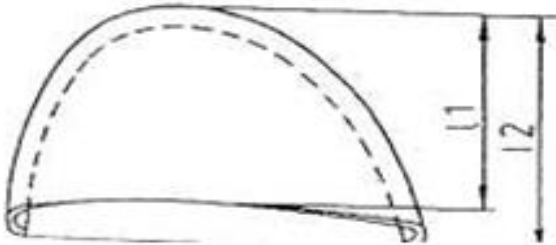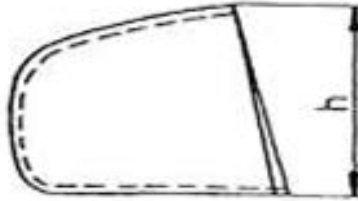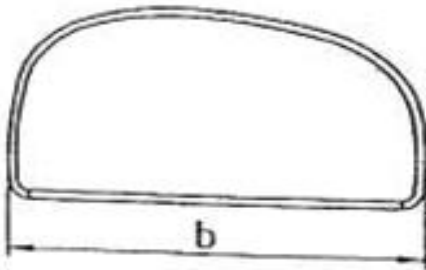

| | thickness | b | h | l1 | l2 | l | Requirement normative EN 12568S | Average Test impact 200J | Average Compression test 15KN | Weight (1 pairs) |
|------------|-----------|------|------|------|------|------|---------------------------------|--------------------------|-------------------------------|------------------|
| Tolerance: | | ±0,7 | ±0,5 | ±1 | ±1 | ±1 | | ±0,5 | ±0,5 | ±0,1 |
| Size # | | | | | | | | | | |
| 2 | | | | | | | | | | |
| 3 | | | | | | | | | | |
| 4 | | | | | | | | | | |
| 5 | | | | | | | | | | |
| 6 | | | | | | | | | | |
| 7 | 1,6 | 83,7 | 40,2 | 41,2 | 45,3 | 39,6 | 20,5 | 24,0 | 31,0 | 0,160 |
| 8 | 1,6 | 86,2 | 42,3 | 41,7 | 46,0 | 40,1 | 21,0 | 24,0 | 32,0 | 0,172 |
| 9 | 1,5 | 87,3 | 43,4 | 43,5 | 47,5 | 42,0 | 21,5 | 26,0 | 31,5 | 0,172 |
| 10 | 1,5 | 91,0 | 44,4 | 45,0 | 49,8 | 43,5 | 22,0 | 25,5 | 34,5 | 0,179 |
| 11 | 1,5 | 93,2 | 45,0 | 45,0 | 49,4 | 43,5 | 22,0 | 26,5 | 34,5 | 0,182 |
| 12 | | | | | | | | | | |

all dimension are in millimeter

Kg

Conformity to the norm

Conforme alle norme

EN 12568 S

ANSI

CSA

Redazione: Bizzotto Nicola

Data: 01/12/2016

Rev.00